



6 Continents &
95 Countries



Over 1.2 million
delighted farmers.



1400 Dealers

FIELDKING

Complete farm mechanization solution



BERI UDYOG PVT LTD

Corporate Office:

Plot No. 235-236 & 238-240, Sec-3,
HSIIDC, Karnal- 132001(Haryana), India

+91 184 2221571/ 72/ 73

info@fieldking.com

Sales & Marketing Office (Exports):

DGL 221, 2nd Floor, The Galleria,
Mayur Vihar, Phase-1, Delhi, India

+91 11 48042089

exports@fieldking.com www.fieldking.com

Our world revolves around innovative farming
solutions & excellent customer support

Sr. No.	Particulars	Page No.
1.	MD's Desk	2
2.	Infrastructure	3-4
3.	Corporate Clients	5
4.	Exhibitions & Trade Shows	6
5.	Presence Across The Globe	7
6.	Product Portfolio	8
7.	Tillage	10-38
	<ul style="list-style-type: none"> • Rotary Tiller • Power Harrow • Disc Harrow • Plough • Multi Row Tiller • Ripper • Sub Soiler • Cultivator • Tyne Ridger • Disc Ridger 	
8.	Haulage	39-42
	<ul style="list-style-type: none"> • Trailer 	
9.	Landscaping	43-46
	<ul style="list-style-type: none"> • Leveler • Rotary Slasher • Rotary Cutter 	
10.	Seeding & Plantation	47-50
	<ul style="list-style-type: none"> • Post Hole Digger • Zero Till • Multi Crop Planter • Pneumatic Planter 	
11.	Crop Protection	51-52
	<ul style="list-style-type: none"> • Tractor Mounted Boom Sprayer • Fertilizer Spreader 	
12.	Harvest & Post Harvest	53-58
	<ul style="list-style-type: none"> • Reciprocating Forage Mower • Hay Rake • Square Baler • Combine Harvester 	
13.	Other Popular Product	59
14.	Marketing Footprints	60-61
15.	360° Sales & Marketing Support	62



Managing Director
(Mr. Ravi Beri)

From The Managing Director’s Desk

It is a truth universally acknowledged that the ultimate objective of all businesses & professional activities is customer delight. Everything has to fall in place to lead to this goal. Keeping this and this alone in mind “FIELDKING” is determined to offer innovative farming solutions as well as extend excellent & responsive customer support wherever and whenever needed. Our core values are supported by strong infrastructure where world class practices are followed. For staying ahead of times you need to continuously reinvent yourself and your products and that is exactly what we try to do.

Our VISION is to build an organization that relentlessly adds value in what it does (i.e. products) and for whom it does (i.e. customers) & through whom it does (i.e. employees).

MISSION is to be a front runner in offering innovative, user friendly & environmentally sustainable farming solutions to farmers around the globe.

In accomplishing our vision and mission our suppliers, channel partners, corporate clients and our work force play a key role and are accorded with respect and recognition as they make us who we are and who we aspire to be.



Our pursuit to perfection in all the spheres of the business is also reflected in our continuous focus and investment in world class infrastructure. Our 3 manufacturing facilities spanning 1,62,000 sqm. are equipped with state-of-the-art machinery & automation allowing us to maintain high quality & consistency.

Stringent quality standards are followed and the company has been accredited as STAR EXPORT HOUSE by the Govt. of INDIA. Company follows TQM, TPM & certified by ISO 9001 : 2008, EMS 140001, OHSAS, CE.



Modernized Assembly Line



Robotics



Conveyorized Paint Shop



Cutting Centers



Machining Centers

Our commitment to excellence in all spheres of business has put us in a position of respect in the global farm equipment industry. We have always been appreciated by our clients for our efforts to achieve customer delight.

Today, we have a huge clientage spread across nations from Asia, Europe, Africa, Mid East, North America and South America. Our vast network of sales and after sales services has enabled us to successfully cater to the needs of the clients in a prompt and efficient manner.

We have a proven track record of going that extra-mile to fulfill the demands of our clients and building an ever-lasting business relationship. Our clientele includes almost all the leading tractor manufacturing companies and export houses of India.



Certified To International Quality Standards



USA



USA



EIMA, ITALY



SIMA, PARIS



AGRITECHNICA, GERMANY



BANGKOK



SOUTH AFRICA



SRI LANKA



BANGLADESH

FIELDKING continues to grow in markets across the globe. This ever increasing demand is a result of continuous value addition. We have sold more than one million equipment around the globe. Our brand name "FIELDKING" is a distinguished name in overseas markets. Company's association with overseas markets is in reach of 95 countries across the globe.




6 Continents & 95 Countries



Over 1.2 million delighted farmers.



1400 Dealers

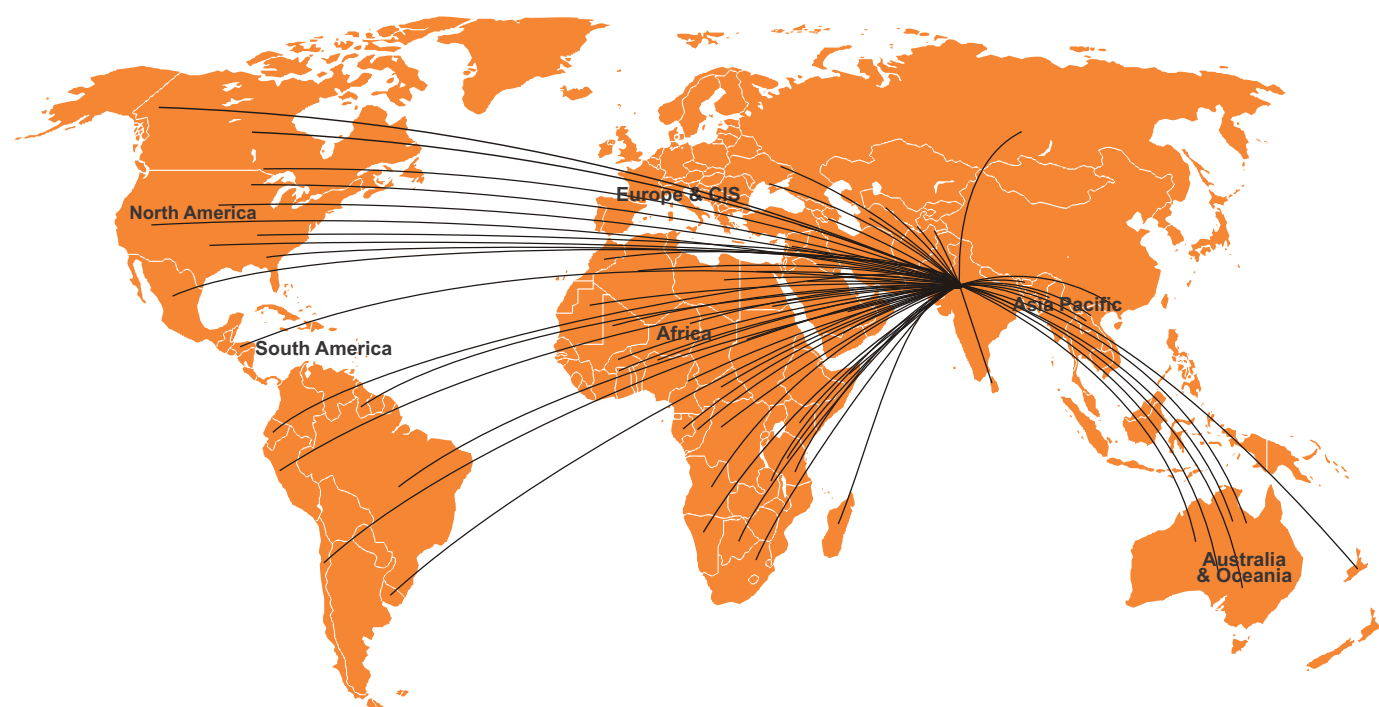

Tillage



Haulage



Landscaping



Seeding & Plantation



Crop Protection



Harvest




Post Harvest





DESCRIPTION		FKDRTSG-125	FKDRTSG-150	FKDRTSG-175	FKDRTSG-200	FKDRTSG-225
Tillage Width		4 ft. 1"	4 ft. 11"	5 ft. 8"	6 ft. 7"	7 ft. 5"
Gear Box		Single Speed (540 RPM)				
Type of Blades		L / C / J				
No. of Blade		30/ 30/ 48	36/ 36/ 60	42/ 42/ 72	48/ 48/ 84	54/ 54/ 96
Weight (Lbs. Approx.)		926	992	1056	1122	1188
Tractor Power (HP)		35-40	40-45	45-50	50-60	60-70


*Different rpm can be achieved by using different side gear ratio i.e. 194 rpm with 18:33:28 & 230 rpm with 19:33:25
For more information visit www.fieldking.com

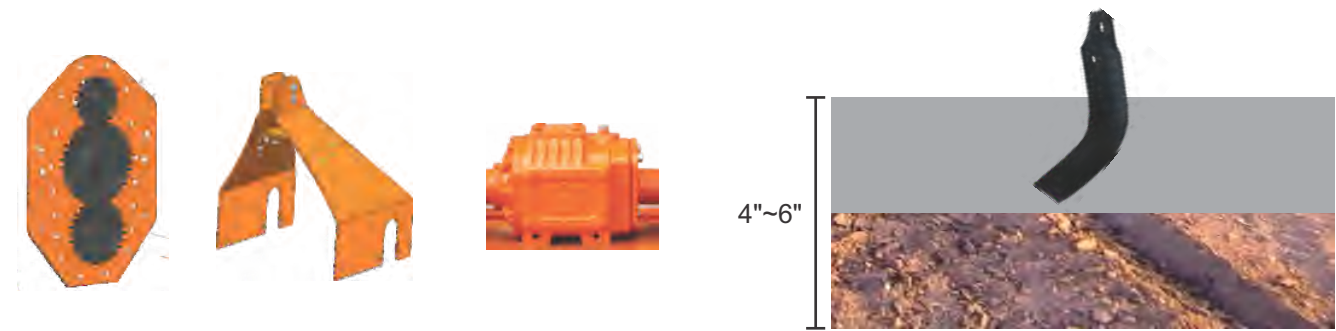



DESCRIPTION	FKDRTMG-175	FKDRTMG-200	FKDRTMG-225	FKDRTMG-250	FKDRTMG-275
Tillage Width	5 ft. 8"	6 ft. 7"	7 ft. 5"	8 ft. 2"	9 ft.
Gear Box	Multi (4 Speed)				
Type of Blades	L/ C/ J				
No. of Blade	42/ 42/ 72	48/ 48/ 84	54/ 54/ 96	60/ 60/ 108	66/ 66/ 120
Weight (Lbs. Approx.)	1122	1188	1254	1320	1386
Tractor Power (HP)	45-50	50-60	60-70	70-80	80-90

*Rotor r.p.m with individual gear drive denoted by C/D represents 18:33:28/19:33:25 respectively.
For more information visit www.fieldking.com

P.T.O RPM			
	A	B	ROTOR R.P.M (C/D)
540	20	16	155/183
	16	20	243/287
	17	19	217/256
	19	17	173/205
1000	22	14	229/270



DESCRIPTION	FKRTSG-100	FKRTSG-125	FKRTSG-150	FKRTSG-175	FKRTSG-200
Tillage Width	3 ft. 4"	4 ft. 1"	4 ft. 11"	5 ft. 8"	6 ft. 7"
Gear Box	Single Speed (11 x 20)				
Type of Blades	L / C/ J				
No. of Blade	24/ 24/ 36	30/ 30/ 48	36/ 36/ 60	42/ 42/ 72	48/ 48/ 84
Weight (Lbs. Approx.)	770	836	902	968	1034
Tractor Power (HP)	25-35	35-40	40-45	45-50	50-60


*Different rpm can be achieved by using different side gear ratio i.e. 190 rpm with 18:33:28 & 225 rpm with 19:33:25
For more information visit www.fieldking.com





DESCRIPTION	FKRTMG-100	FKRTMG-125	FKRTMG-150	FKRTMG-175	FKRTMG-200
Tillage Width	3 ft. 4"	4 ft. 1"	4 ft. 11"	5 ft. 8"	6 ft. 7"
Gear Box	Multi (4 Speed)				
Type of Blades	L / C / J				
No. of Blade	24/ 24/ 36	30/ 30/ 48	36/ 36/ 60	42/ 42/ 72	48/ 48/ 84
Weight (Lbs. Approx.)	838	904	970	1036	1102
Tractor Power (HP)	25-35	35-40	40-45	45-50	50-60

*Rotor r.p.m with individual gear drive denoted by C/D represents 18:33:28 / 19:33:25 respectively.
For more information visit www.fieldking.com

P.T.O			
RPM			
	A	B	ROTOR R.P.M (C/D)
540	20	16	144/170
	16	20	225/266
	17	19	201/238
1000	19	17	161/190
	22	14	212/251









DESCRIPTION	BRTMG 145	BRTMG 165	BRTMG 185	BRTMG 205
Tillage Width	4 ft. 9"	5 ft. 5"	6ft. 1"	6 ft. 9"
Gear Box	Multi (2 Speed)			
Type of Blades	L & C			
No. of Blade	42	48	54	60
Weight (Lbs. Approx.)	750	794	838	882
Tractor Power (HP)	35-40	40-45	45-50	50-60

*Rotor r.p.m with individual gear drive denoted by C/D represents 18:33:28/19:33:25 respectively.
For more information visit www.fieldking.com





DESCRIPTION		FKRTMSC- 80	FKRTMSC-100	FKRTMSC-120	FKRTHSC-140	FKRTHSC-160	FKRTHSC-180
Tillage Width		2 ft. 7"	3 ft. 4"	3 ft. 9"	4 ft. 7"	5 ft.2"	5 ft.11"
Gear Box (rpm)		Single Speed (15x22)			Single Speed (11x20)		
Type of Blades		Small L & C					
No. of Blade		24	30	36	42	48	54
Weight (Lbs. Approx.)		375	412	448	520	569	615
Tractor Power (HP)		15-20	20-25	25-30	30-35	35-40	40-45

For more information visit www.fieldking.com



DESCRIPTION	FKRPH-5	FKRPH-6	FKRPH-7	FKRPH-9	FKRPH-11
Cutting Width	3 ft. 11"	4 ft. 9"	5 ft. 7"	6 ft. 11"	8 ft. 8"
PTO Rpm / Rotor Rpm	Single Speed (540 / 302)				
No. of Rotor	5	6	7	9	11
No. of Blades	10	12	14	18	22
Blades Thickness	14 (mm)				
Gear Box Overload Protection	Shear Bolt				
Weight With Crumbler (Lbs. Approx.)	992	1213	1433	1764	2094
Tractor Power (HP)	40-45	45-60	55-75	75-100	100-125


For more information visit www.fieldking.com






DESCRIPTION		FKMDHC-22-12	FKMDHC-22-16	FKMDHC-22-20	FKMDHC-22-24	FKMDHC-22-28
No. of Disc		12	16	20	24	28
Width of Cut (Approx.)		4 ft. 11"	6 ft. 7"	8 ft. 3"	9 ft. 10"	11 ft. 6"
Weight (Lbs. Approx.)		1631	2281	2698	2906 / 3126	3532 / 3650
Tractor Power (HP)		45-55	55-65	65-90	95-120	125-150

For more information visit www.fieldking.com

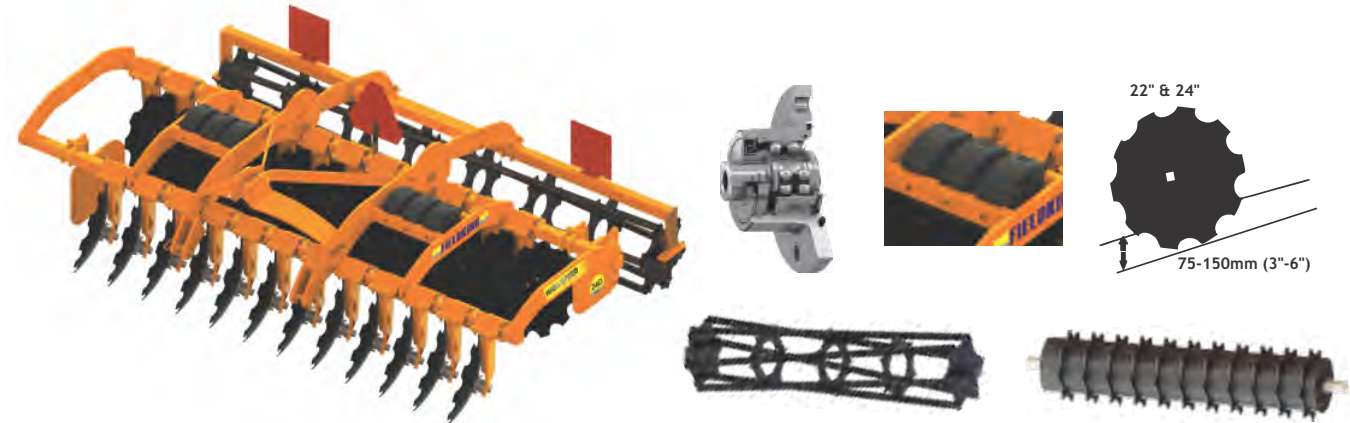



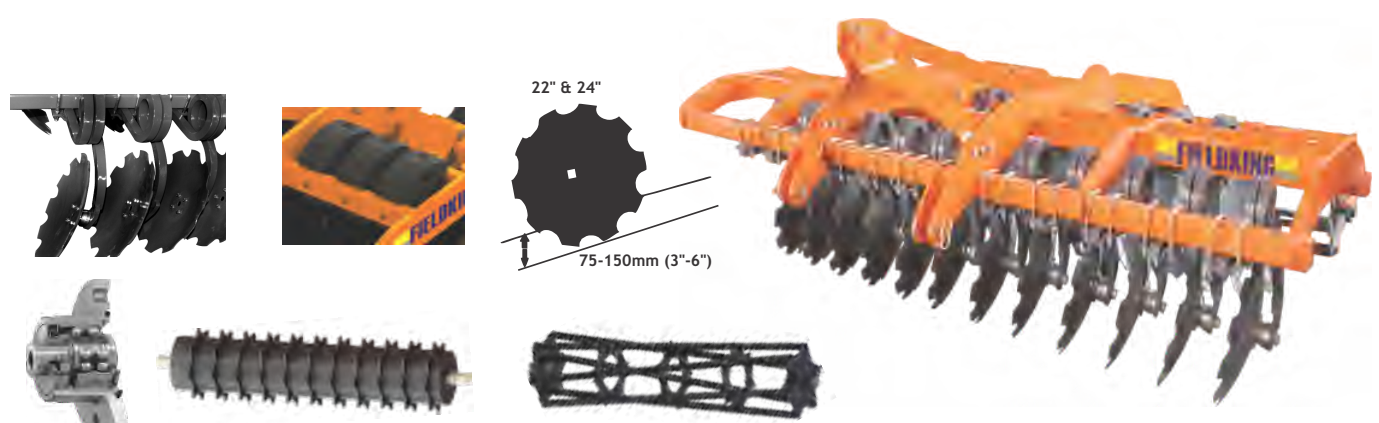

DESCRIPTION		FKMDHDC-22-24
No. of Disc		24
Width of Cut (Approx.)		9 ft. 10"
Weight (Lbs. Approx.)		2906 / 3126
Tractor Power (HP)		95-120

For more information visit www.fieldking.com










DESCRIPTION		FKUSDHH - 24	FKUSDHH - 28	FKUSDHH - 32	FKUSDHH - 36
No. of Disc		24	28	32	36
Width of Cut (Approx.)		10 ft. 3"	12 ft.	13 ft. 10"	15 ft. 6"
Weight With Crumbler (Lbs. Approx.)		7449	8690	9931	11173
Tractor Power (HP)		125-140*	145-165*	170-200*	210-235*

*Due to additional dead weight extra heavy duty hydraulic harrow operates on higher range of tractor (HP)
For more information visit www.fieldking.com



DESCRIPTION		FKHDHH-18	FKHDHH-20	FKHDHH-22	FKHDHH-24	FKHDHH-28	FKHDHH-32
No. of Disc		18	20	22	24	28	32
Width of Cut (Approx.)		6 ft. 11"	7 ft. 6"	8 ft. 3"	8 ft. 10"	10 ft. 3"	11 ft. 6"
Weight (Lbs. Approx.)		3395	3593	3880	4067	4442	4784
Tractor Power (HP)		70-80	80-90	90-110	115-135	140-165	170-190

For more information visit www.fieldking.com

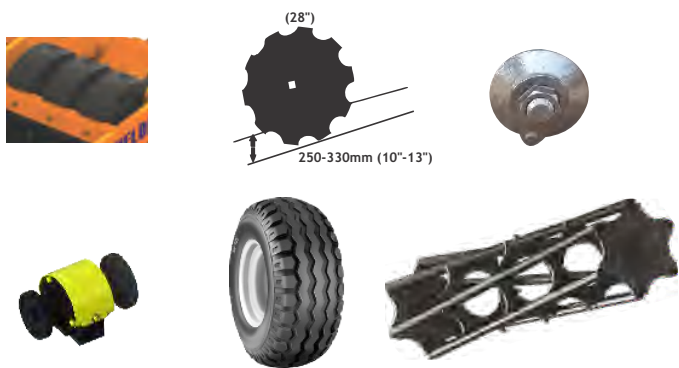





DESCRIPTION		FKEHDH - 24	FKEHDH - 28	FKEHDH - 32	FKEHDH - 36
No. of Disc		24	28	32	36
Width of Cut (Approx.)		8 ft. 10"	10 ft. 3"	11 ft. 6"	12 ft. 10"
With Dead Weight (Lbs. Approx.)		6997*	7288*	7624*	8047*
Tractor Power (HP)		125-140*	145-165*	170-200*	210-235*

*Due to additional dead weight extra heavy duty hydraulic harrow operates on higher range of tractor (HP)
For more information visit www.fieldking.com

DESCRIPTION		FKMODH-12	FKMODH-14	FKMODH-16	FKMODH-18	FKMODH-20	FKMODH-22	FKMODH-24
No. of Disc		12	14	16	18	20	22	24
Width of Cut (Approx.)		4 ft. 8"	5 ft. 5"	6 ft. 2"	6 ft. 10"	7 ft. 6"	8 ft. 3"	8 ft. 11"
Weight (Lbs. Approx.)		860	950	1102	1268	1356	1490	1612
Tractor Power (HP)		30-40	40-50	50-60	60-70	70-80	80-90	90-100


For more information visit www.fieldking.com

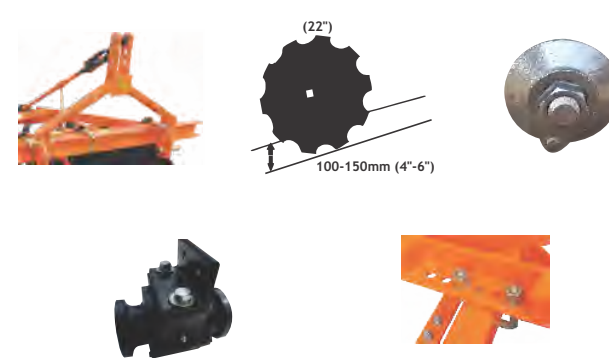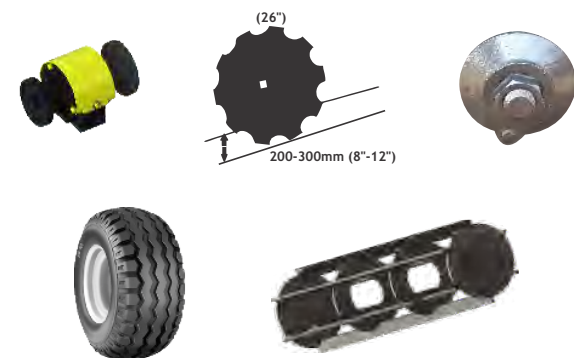



DESCRIPTION	FKCMDH-16	FKCMDH-18	FKCMDH-20	FKCMDH-22	FKCMDH-24
No. of Disc	16	18	20	22	24
Width of Cut (Approx.)	6 ft. 4"	7 ft.	7 ft. 10"	8 ft. 5"	9 ft. 2"
Weight (Lbs. Approx.)	1852	2116	2260	2414	2579
Tractor Power (HP)	50-60	60-70	70-80	90-100	105-125

For more information visit www.fieldking.com

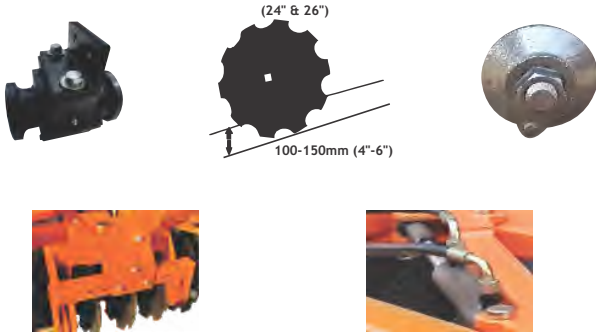

Tandem Disc Harrow Light Series

DESCRIPTION	FKTDHM-7.5-20	FKTDHM-7.5-24
No. of Disc	20	24
Width of Cut (Approx.)	5 ft.	6 ft. 2"
Weight (Lbs. Approx.)	783	915
Tractor Power (HP)	45-50	55-65

For more information visit www.fieldking.com



Tandem Disc Harrow Medium Series

DESCRIPTION	FKTDHMS-12	FKTDHMS-16	FKTDHMS-20
No. of Disc	12	16	20
Width of Cut (Approx.)	4 ft. 8"	6 ft.	7 ft. 6"
Weight (Lbs. Approx.)	662	849	970
Tractor Power (HP)	25-30	35-40	45-50

For more information visit www.fieldking.com



Tandem Disc Harrow Heavy Series

DESCRIPTION	FKTDHHS-20	FKTDHHS-24
No. of Disc	20	24
Width of Cut (Approx.)	8 ft.	9 ft. 4"
Weight (Lbs. Approx.)	1279	1411
Tractor Power (HP)	55-65	75-90

For more information visit www.fieldking.com





Hexagonal heavy duty drawbar




Boron steel disc with scraper attachment



Optional model (3+1) bottom

DESCRIPTION	FKMDP-2	FKMDP-3	FKMDP-4	FKMDP-5
No. of Disc	2	3	4	5
Width of Cut (Approx.)	1 ft. 7" ~ 1 ft. 10"	2 ft. 10" ~ 3 ft.	3 ft. 9" ~ 3 ft. 11"	5 ft. 2" ~ 5 ft. 4"
Weight (Lbs. Approx.)	684	915	1125	1367
Tractor Power (HP)	50-60	65-80	85-100	105-125

For more information visit www.fieldking.com

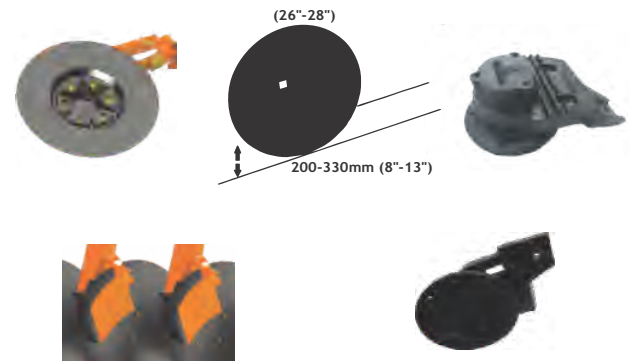



Tyre assembly for easy transportation



Long lasting, wear resistant boron steel blade



Turn buckle for adjusting of the plough

DESCRIPTION	FKRMBPH-36 - 2	FKRMBPH-36 - 3
Number of Furrow	2	3 (2+1 Optional)
Width of Cut (Approx.)	2 ft. 4"	3 ft. 5"
Depth of Cut (Max.)	1 ft. 2"	
Weight (Lbs. Approx.)	1012	1397
Tractor Power (HP)	55-70	75-100

For more information visit www.fieldking.com



Rugged frame



Boron steel tynes with overload protection





DESCRIPTION	FKMBP36-2	FKMBP36-3	FKMBP36-4
Number of Furrow	2	3	4
Width of Cut (Approx.)	2 ft. 4"	3 ft. 4"	4 ft. 4"
Depth of Cut (Max.)		1 ft. 2"	
Weight (Lbs. Approx.)	467 / 518	770	1001
Tractor Power (HP)	45-60	65-75	80-95

For more information visit www.fieldking.com



Drawbar adjustment



Rugged frame



Long lasting, wear resistant blade & bar point



3 point linkage



DESCRIPTION	FKMRDCT -13	FKMRDCT -19
Length	7 ft. 9"	11 ft. 5"
Crumbler Weight (Lbs. Approx.)	441	551
Weight Without Crumbler (30 x30 mm Sq. Tyne) (Lbs. Approx.)	1235	1764
Tractor Power (HP)	65-90	90-120

For more information visit www.fieldking.com



Double coil spring action tyne



Easy depth controller





DESCRIPTION		FKR- 5
Working Width		5 ft. 11"
Working Depth (Max.)		1 ft. 4"
Number of Tynes (pcs.)		5
Weight Without Crumbler (Lbs. Approx.)		1091
Weight With Crumbler (Lbs. Approx.)		1878
Tractor Power (HP)		55-60 (4WD / 60-65 (2WD)

For more information visit www.fieldking.com



Sturdy
3 point linkage



Spiral crumbler



Special Design tyne
with safety bolt



Tyne mounting clamp
& shear bolt



DESCRIPTION		FKHDSS - 1	FKHDSS - 2	FKHDSS - 3
Working Width		2. 8"	2 ft. 7"	4 ft.
Working Depth (Max.)			2 ft. 4"	
No. of Tyne		1	2	3
Weight (Lbs. Approx.)		232	992	1146.5
Tractor Power (HP)		40-65	60-75	90-115

For more information visit www.fieldking.com



Crumbler (Optional)





Tyne & angle of attack



Replaceable tyne edge



Long lasting, wear
resistant shoe & blade

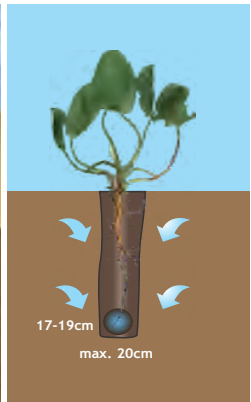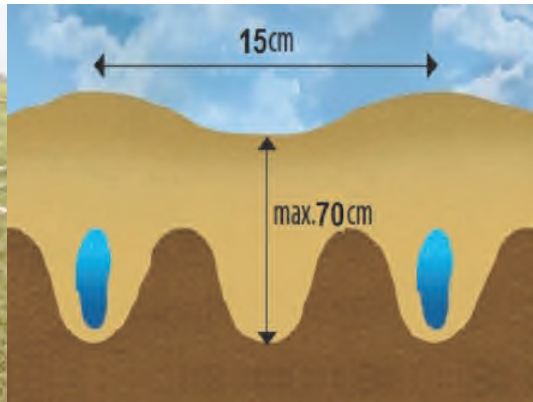



DESCRIPTION		FKSS-1	FKSS-2	FKSS-3	FKSS-5
Working Width		2.8"	2 ft. 4"-3 ft. 2"	3 ft. 6"-4 ft. 3"	5 ft. 11"
No. of Tyne		1	2	3	5
Working Depth (Max.)			1 ft. 9"		
Weight Without Crumbler (Lbs. Approx.)		150	430	617	1257
Weight With Crumbler (Lbs. Approx.)		NA	540	948	1741
Tractor Power (HP)		40-55	60-75	80-95	100-135

For more information visit www.fieldking.com



Top link height adjustment of crumbler



Depth adjustment



Bearing hub



Crumbler optional



DESCRIPTION		FKDCT - 7	FKDCT - 9	FKDCT - 11	FKDCT - 13	FKDCT - 15	FKDCT - 21
Tynes				Sq. 0.98" / 1.18" / 1.37"			Sq. 1.2" / 1.4"
Width of Cut		4 ft. 6"	6 ft.	7 ft. 6"	9 ft.	10 ft. 6"	15 ft. 1"
Shovel to Shovel Distance				2 ft. 1"			3 ft.
Weight (Lbs. Approx.)		386/467/600	496/600/771	606/732/943	716/864/1115	827/999/1285	2573/2171
Tractor Power (HP)		35-45	45-60	60-75	75-90	90-110	90-120

For more information visit www.fieldking.com



U clamp for attachment & adjustment of tyne



Powerful folding mechanism








The residue/weed almost never gets entangled



Double coil tyne of EN-45 material





DESCRIPTION	FKSLOEHD-5	FKSLOEHD-7	FKSLOEHD-9	FKSLOEHD-11	FKSLOEHD-13	FKSLOEHD-15
Tynes 	2" x 1" (Forged)					
Width of Cut 	3 ft.	4 ft. 6"	6 ft.	7 ft. 6"	9 ft.	10 ft. 6"
Shovel to Shovel Distance 	15"					
Weight (Lbs. Approx.) 	287	397	628	760	890	1056
Tractor Power (HP) 	30-40	35-45	40-50	55-65	70-80	85-95

For more information visit www.fieldking.com



Shovel is made of EN-42 material



Heavy duty frame







Spring having more capacity of absorbing shock



Tyne is made of EN-9 material



DESCRIPTION	FKTRT - 3	FKTRT - 4	FKTRT - 5
Width of Cut Adjustable	8 ft. 2"	11 ft. 5"	14 ft. 8"
Tyne To Tyne Distance (Adjustable) 	3 ft. 3"		
No. of Tyres (Optional) 	2		
Weight (Lbs. Approx.) 	441	507	838
Tractor Power (HP) 	40-55	60-80	85-105

For more information visit www.fieldking.com



Shovel is made of EN-42 material



Adjustable tynes



Radial tyre depth adjustment







3 Point linkage









Disc Ridger with Roller

DESCRIPTION		FKDRR-1	FKDRR-2
No. of Disc		2	4
Maximum Width Between Ridges		4 ft. 11"	
Weight (Lbs. Approx.)		992	2205
Tractor Power (HP)		50-75	75-110


For more information visit www.fieldking.com



Disc Ridger

DESCRIPTION		FKDR-1	FKDR-2
No. of Disc		2	4
Maximum Width Between Ridges		3 ft. 3"	
Weight (Lbs. Approx.)		494	959
Tractor Power (HP)		50-65	70-90

For more information visit www.fieldking.com

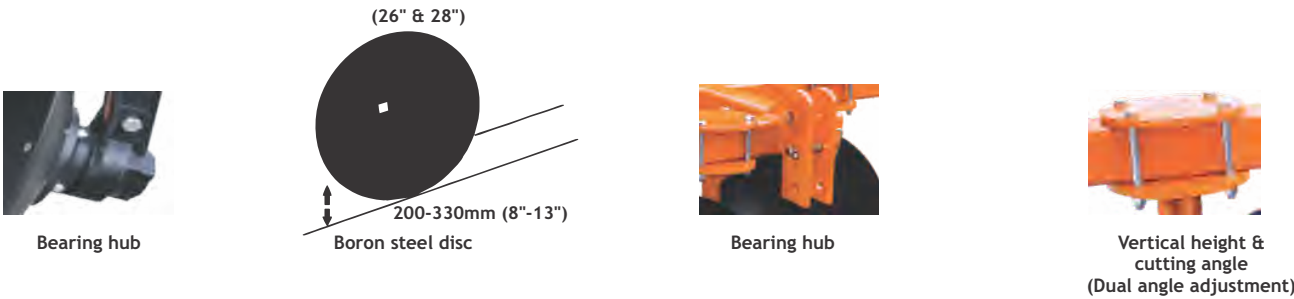



Telescopic hydraulic cylinder



Corrugated sheet for strength



Detachable drawbar for increased loadability



Brake light reflectors & indicators for safety

Tipping trailers are available in E model & C model with 2 tyres & 4 tyres options.

DESCRIPTION	FKAT2WT-E-2TON	FKAT2WT-E-3TON	FKAT2WT-E-5TON	FKAT2WT-E-9TON	FKAT2WT-E-10TON
Outer Dimensions	8 ft.x 4 ft.x 1 ft. 6"	8 ft.x 6 ft.x 2 ft.	10 ft.x 6 ft.x 2 ft.	12 ft.x 6 ft.x 2 ft.	13 ft.x 7 ft.x 2 ft.
Side Wall Sheet	2/3mm (Corrugated)				
Tyres	6.00x16, 7.50x16, 9.00x16				
Axle	2.6"/3" Square				
Weight (Lbs. Approx.)	1323	2235	2601	3424	4012
Leaf Spring (Optional)	36"				
Tractor Power (HP)	20-35	30-50	50-70	70-90	90-120

For more information visit www.fieldking.com



Wider tyres for better stability & gripping



Vertical screw jack for easy parking



Plain floor sheet




Heavy duty axle



Robust hub



Telescopic hydraulic cylinder

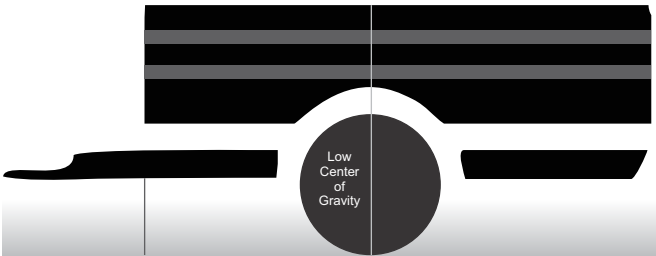



DESCRIPTION	FKAT2WT-E-3TON	FKAT2WT-E-5TON	FKAT2WT-E-9TON
Outer Dimensions	(8 ft. x 6 ft. x 2 ft.)	(10 ft. x 6 ft. x 2 ft.)	(12 ft. x 6 ft. x 2 ft.)
Tyres	7.50 x 16, 9.00 x 16, 12.5/80-15.3 & 400 / 60-15.5 (14 to 18 PR)		
Axle (Brake Optional)	3" Square		3.5" Square
Weight (Lbs. Approx.)	2789	3483	4189
Leaf Spring (Optional)	3 ft.		3 ft. 6"
Tractor Power (HP)	30-50	50-70	70-90

For more information visit www.fieldking.com

DESCRIPTION	FKAT4WNT-5T	FKAT4WNT-9T	FKAT4WNT-12T
Outer Dimensions	(10 ft. x 6 ft. x 2 ft.)	(12 ft. x 6 ft. x 2 ft.)	(14 ft. x 7 ft. x 2 ft.)
Tyres	4 nos. of 7.5 x 16		2nos. of 7.5x16, 2nos. of 9.00x16
Axle	3" Sq. (Front & Rear)		3" Sq.(Front), 3.5" Sq.(Rear)
Weight (Lbs. Approx.)	3417	3792	4409
Tractor Power (HP)	50-70	70-90	90-110

For more information visit www.fieldking.com



Bob hinge mechanism



Tubular structure
Chassis



Corrugated sheet



Safety valve
mechanism



Corrugated sheet



Tyre assembly



Ring hitch



Revolving disc





Laser system


- Machine control system to be mounted on tractor consist of :
- 1) Receiver to be mounted on a electric operated power mast directly attached to bucket : High precision: $\pm 1\text{mm}$ / Normal precision: $\pm 2\text{mm}$, Operating temperature: -20°C / -4°F to $+50^{\circ}\text{C}$ / 122°F , Water and dust resistance: IP65
 - 2) Power cable for powering system from tractor power (12Volt).
 - 3) Cable connecting Control Box (Auto panel) to Valves of tractor for Hydraulic control.

Laser transmitter unit mounted on tripod consist of :

- 1) Laser transmitter with carrying case. A rugged self leveling laser system with automatic elevation alert, bright red (635nm) beam and a working operating range (Diameter) 2297ft.-2625 ft. Self-leveling Range: ± 3 degrees, Automatic self-leveling in level & slope mode, Operating temperature: -20°C / -4°F to $+50^{\circ}\text{C}$ / 122°F .

Eco planer scraper bucket system :

DESCRIPTION		6.6 ft.	8 ft.	9.8 ft.
Width of Cut		6 ft. 6"	8 ft.	9.8 ft.
Tyre Size		6.00 x 16 (Single/Double), 10.0/75-15.3 & 13/55-16 (Optional)		
Tractor Power (HP)		55-65	70-85	90-105

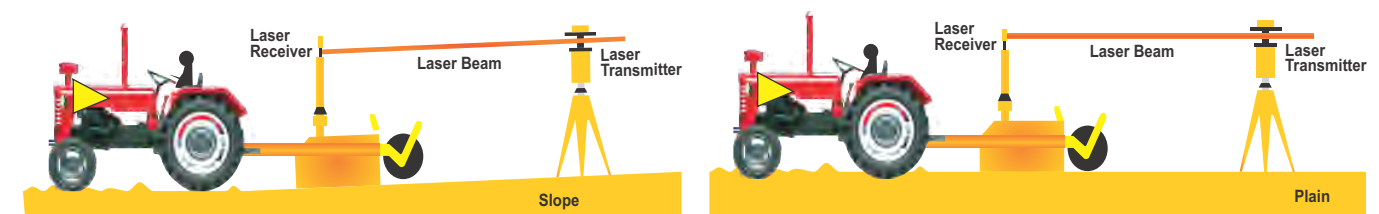




DESCRIPTION	FKRSSTO-6	FKRSSTO-7
Cutting Width	5 ft. 3"	6 ft. 5"
Gearbox Rating (HP)	75	
Weight (Lbs. Approx.)	1393	1570
Tractor Power (HP)	50-75	75-90

For more information visit www.fieldking.com



Canister



3 Point linkage offset




Chain for safety



Long lasting, wear resistant blades



Tyre assembly for depth control



Chain for safety



Long lasting, wear resistant blades



Cat-I, Cat-II & quick hitch compatibility



Tyre assembly for depth control



DESCRIPTION	FKRC-48	FKRC-60	FKRC-72	FKRC-84
Cutting Width	4 ft.	5 ft.	6 ft.	7 ft.
Gearbox Rating (HP)	40	75		90
Weight (Lbs. Approx.)	490	723	876	1223
Tractor Power (HP)	15	25	35	45

For more information visit www.fieldking.com





DESCRIPTION	FKPHDS - 6	FKPHDS - 9	FKPHDS - 12	FKPHDS - 18
Working Depth	2 ft. 11"			
Gear Box	Compatible with 55 HP max., with 3:1 ratio			
Auger Sizes	6"	9"	12"	18"
Weight (Lbs. Approx.)	296	315	331	397
Tractor Power (HP)	35-40	40-45	45-50	50-55

For more information visit www.fieldking.com



Clutch type PTO



Gearbox



Long lasting, wear resistant blades



Long lasting, wear resistant auger tip



DESCRIPTION	FKDSFM-9	FKDSFM-11	FKDSFM-13
No. of Fluted Roller	18	22	26
No. of Seed & Fertilizer Distribution Pipes	18	22	26
No. of Row	9	11	13
Working Width	5 ft. 2"	6 ft. 5"	7 ft. 9"
Seed Tank (Capacity Lbs.)	132	165	198
Fertilizer Tank (Capacity Lbs.)	132	165	198
Weight (Lbs. Approx.)	683	838	992
Tractor Power (HP)	30-45	50-65	70-85

For more information visit www.fieldking.com



Seed box & fluted roller



Height adjustable wheel





Seed drill machine tyne



Disc assembly





DESCRIPTION	2 Rows	3 Rows	4 Rows	5 Rows	6 Rows
Available in	2	3	4	5	6
Seed Metering	Rotating Disc with cells on its periphery.				
Fertilizer Metering	Agitator & Sliding Orifice.				
Row Space	24" max. & adjustable with 'U' Clamps				
Drive	Ground Wheel driven (Driving wheel is at front in centre of Planter)				
Sowing Depth	Adjustable (Depth Control Wheels are provided on both sides of Planter)				
Furrow Openers	Shovels for sowing in tilled/prepared fields				
Weight (Lbs. Approx.) 	309	397	617	728	827
Tractor Power (HP) 	20-25	25-35	35-45	45-60	60-75

For more information visit www.fieldking.com



Seed & fertilizer box



Driving & depth control wheel





Side shovel



Tyne assembly



DESCRIPTION	2 Rows	4 Rows	6 Rows
Available in Row	2	4	6
Minimum Row Spacing	1 ft.		
Depth for Depth Control Wheel (Max.)	4"		
Seed Hopper Capacity (Liters)	27 x2	27 x 4	27 x 6
Fertilizer Hopper Capacity (Liters)	130 x 1	130 x 2	130 x 3
Toolbar Width	3 ft. 4.5"	6 ft. 9"	10 ft. 1"
Useful Width	3 ft. 4.5"	6 ft. 9"	10 ft. 1"
Total Width	3 ft. 4.5"	6 ft. 9"	10 ft. 1"
Weight (Lbs. Approx) 	1646	3296	4938
Tractor (HP) 	45-50	50-60	60-70

For more information visit www.fieldking.com



Metering mechanism



Fertilizer box



Depth adjusting wheel




Seed box






DESCRIPTION	FKTMS-550	FKTMS-1100
Capacity (Ltr.)	550	1100
Boom Span (Mtr.)	4/6/8/10/12/14/16	12/16/20/24/28/32
No. of Nozzles	12/16/20/24/28/32	
Weight of Frame (Lbs. Approx.)	357	440
Tractor Power (HP)	50-70	75-90

For more information visit www.fieldking.com

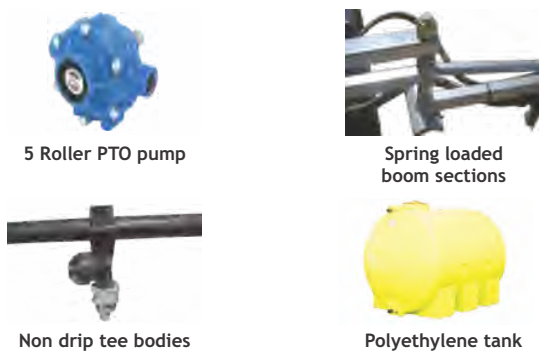




DESCRIPTION	FKFS-180	FKFS-250	FKFS-400
Capacity(Ltr.)	180	250	400
Spreading Capacity	26 ft.5" - 46 ft.		
Transmission	1:1		
Weight (Kg. Approx.)	54	56	60
Tractor Power (HP)	20 (Min)		

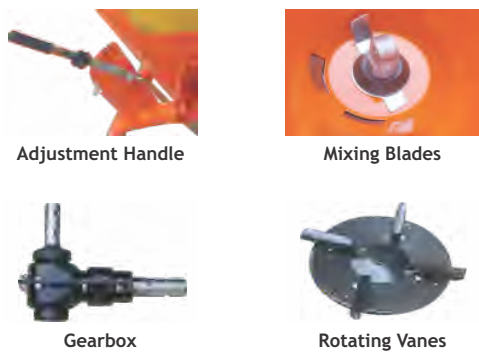

For more information visit www.fieldking.com





DESCRIPTION	FKRFM-5	FKRFM-6
Total Length	8 ft. 8"	10 ft. 1"
Total Number of Blades	19	25
Cutting Width 	4 ft. 11"	6 ft. 4"
Work Speed (Km/h)	7-10	
P.T.O (rpm)	540	
Weight (Lbs. Approx.) 	408	441
Tractor Power (HP) 	35-50	40-55

For more information visit www.fieldking.com

DESCRIPTION	FKHR-Z-510
Working Width of Tedding	7 ft. 7"
Working Width of Raking	4 ft. 11"
Number of Raking Wheels	4
Weight (Lbs. Approx.) 	269
Tractor Power (HP) 	25-35

For more information visit www.fieldking.com





Bale counting meter




Feeding wheel
(Optional)



Knotter



Flywheel coupling

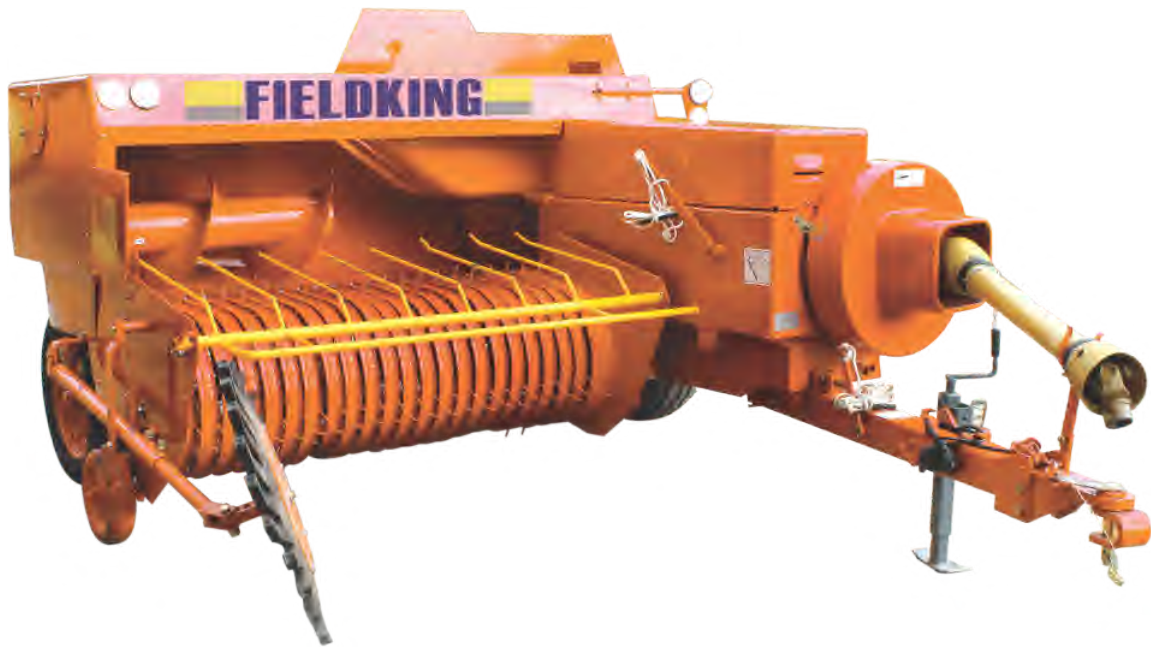

DESCRIPTION		SQUARE BALER FKSB-511
Pick-Up Width		6 ft.
Bale Chamber (Width x Height)		1 ft. 6" x 1 ft. 3"
Bale Length (Smooth Adjustment) (m)		0.3 - 1.3
Pto Shaft Speed (rpm)		540
No. of Knotter		2
Binding Twine Capacity		4
Pick-Up Lifting		Mechanical
Tires		
RH Standard Tire Size		185R15C
LH Standard Tire Size		10.0-75/15.3
Gauge Wheels		Steel Wheel
Draw Bar Lifting		Mechanical
Optional Equipment	a) hydraulic moving of the draw bar c) bale chute	b) hydraulic pick-up adjustment d) Feeding Wheel
Dimensions		
Length		13 ft. 10"
Width		8 ft.
Height		5 ft. 4"
Weight (Lbs.)	⚠️	2932
Tractor Power (HP)	🚜	35-50

For more information visit www.fieldking.com



The Harvesting Revolution Starts Here!

Presenting Fieldking

MCH

FIELDKING

Multi Crop Harvester



**MULTI
CROP
HARVESTER**



Rice

Wheat

Soybean

Pulses

Corn

DESCRIPTION		FKMCCRH - 2.20
Feeding Capacity (Lbs/s)		8.81
Working Dimension (Lbs. L x W x H)		16ft. 10" x 9ft. 6" x 8ft. 10"
Weight	(Lbs.)	6614
Cabin/Sunshade		Sun Roof
Gear Box	ZKB65	
HST		40CC HST Imported from south Korea
Grain-unloading Unit	Grain Tank Capacity (m³)	1.4
	Grain Discharging Type	All direction discharging pipe
Alarm Units		Water temperature, Battery, Oil, Grain Tank
Harvesting Efficiency (Acre/Per Day)		8~14
Crops		Rice, Wheat, Cole, Corn

For more information visit www.fieldking.com



Specially designed powerful 88hp engine



Reliable parts design and higher operating efficiency of thresher



Specially designed engine air ventilation with cooling radiator

Engine	Engine	Vertical, Water-cooling, 4x4 Inject, Turbocharger
	Displacement (L[cc])	2.980 [2980]
	Power/Speed (ps[Hp]/rpm)	88/2600
	Fuel	Light Diesel Oil
	Fuel Capacity (L)	115
	Fuel Consumption (Lbs./hm ²)	37-64
	Start	Motor Starter

Harvesting Unit	Grain Lifter		Divider
	Reel Bat	Dia. x Length	∅ 2 ft. 11" x 6 ft. 8"
		Adjusting Means	Hydraulic
	Working With		7 ft. 3"
	Stubble Height [Lift]		40cm or above
Threshing Unit	Fallen Crop (Angle)		Flow: Less than 85° Reverse less than 70°
	Threshing Mode		Axial Flow Type, Bullet Rotor
	Threshing Rotor	Type of Threshing	Beat Bar
		Dia. x Length	∅ 2 ft. x 6 ft. 7"
		Rotating Speed (rpm)	560 / 600
	Separating Type		Vibrating Screen. Air Separating (3Air Blows)
	Area of Sieves (Lower and Upper Sieves) (m²)		1.645



Single maneuvering lever makes machine easy to operate



Different RPM of reel (35, 38, 41, 45). Easy to change single belt




Quick 340° rotating grain discharge auger & hydraulic operated vertical height adjustment

Walking Part	Rubber Track	Length of Ground Contact		5 ft. 7"
		Center Distance		3 ft. 10"
		Size		1 ft. 6" x 3.5" x 2"
		Average Contact Presure (kpa[kgf]/cm²)		20 Kpa
	Min. Ground Clearance			11.8"
	Walk	Forward (km/H)		Low:0-0.97, Medium:0-1.85, High:0-2.5
	Speed	Reverse (km/H)		



Straw anti-winding design of Rubber Track for good performance in paddy field

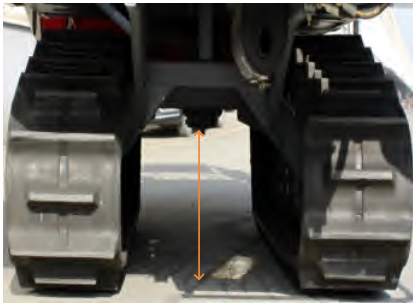

Higher ground clearance (300mm)



Double oil cylinder header assembly for better stability



Heavy Duty Cultivator



Rigid Cultivator



Bale Spears



Water Tanker



Heavy Duty Land Leveler



Terracer Blade



Box Blade



Double Coil Cultivator





Asia Pacific



Africa



Product Demo



Product Packaging



Dealer & Customer meet



Store Standardization



Road Shows & Service Camps

